



**STRONG PARTNERS.
TOUGH TRUCKS.™**



MEDIUM AND HIGH LEVEL ORDER PICKERS

K1.0L, K1.0L SL, K1.0L WP, K1.0M, K1.0H, K1.0H WP

1 000 KG @ 600 MM



K1.0L, K1.0L SL, K1.0L WP

DISTINGUISHING MARKS	
1.1	Manufacturer (abbreviation)
1.2	Manufacturer's type designation
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas
1.4	Operator type: hand, pedestrian, standing, seated, order-picker
1.5	Rated capacity / Rated load
1.6	Load centre distance
1.8	Load distance, centre of drive axle to fork
1.9	Wheelbase

WEIGHTS	
2.1	Service weight
2.2	Axle loading, laden front/rear
2.3	Axle loading, unladen front/rear

TYRES / CHASSIS	
3.1	Tyres: polyurethane, tophane, vulkollan, front/rear
3.2	Tyre size, front
3.3	Tyre size, rear
3.5	Wheels, number front/rear (x = driven wheels)
3.7	Tread, rear

DIMENSIONS	
4.2	Height, mast lowered
4.4	Lift
4.5	Height, mast extended *
4.7	Height of overhead guard (cabin) *
4.8	Seat height relating to SIP/stand height
4.11	Additional lift
4.14	Stand height, elevated
4.15	Height, lowered +
4.19	Overall length + †
4.20	Length to face of forks + †
4.21	Overall width ◊
4.22	Fork dimensions DIN ISO 2331 ▶
4.23	Fork carriage ISO 2328, class/type A, B
4.24	Fork-carriage width ◊
4.25	Distance between fork-arms □
4.31	Ground clearance, laden, below mast
4.32	Ground clearance, center of wheelbase
4.33	Load dimension b ₁₂ x l ₁ lengthwise
4.34.1	Transfer aisle width for pallets 1000mm x 1200mm lengthwise *
4.34.2	Transfer aisle width for pallets 800mm x 1200mm lengthwise *
4.35	Turning radius

PERFORMANCE DATA	
5.1	Travel speed, laden/unladen
5.2	Lift speed, laden/unladen (Cab)
5.2	Lift speed, laden/unladen (SL)
5.3	Lowering speed, laden/unladen (Cab)
5.3	Lowering speed, laden/unladen (SL)
5.7	Gradeability, laden/unladen
5.8	Max. gradeability, laden/unladen
5.9	Acceleration time, laden/unladen
5.10	Service brake

POWER UNIT	
6.1	Drive motor S2 60 minute rating
6.2	Lift motor, S3 15% rating
6.3	Battery according to DIN 43531/35/36 A, B, C, no
6.4	Battery voltage/nominal capacity K5
6.5	Battery weight ▼
6.6	Energy consumption according to VDI cycle

DRIVE / LIFT MECHANISM	
8.1	Type of drive unit

ADDITIONAL DATA	
10.7	Sound pressure level at the driver's seat

HYSTER		HYSTER		HYSTER	
K1.0L AC 0.7 FC		K1.0L AC 1.4 FC		K1.0L AC 1.2	
Battery		Battery		Battery	
Order-picker		Order-picker		Order-picker	
1		1		1	
600		600		600	
144		96		166	
1390		1390		1390	

1550		1750		1600		1700	
350	2200	350	2400	350	2250	350	2350
900	650	950	800	900	700	950	750

Vulkollan/Vulkollan		Vulkollan/Vulkollan		Vulkollan/Vulkollan	
254 x 125		254 x 125		254 x 125	
125 x 94		125 x 94		125 x 94	
1x	2	1x	2	1x	2
660		660		660	

1074		1794		1654		1654		
690		1410		1010		1010		
-		-		2664		2664		
1957 ◆		-		-		-		
180		180		180		180		
-		-		690		-		
-		-		1190		1190		
80		80		80		80		
2907		2874		2929		2929		
1767		1719		1789		1789		
796		780		780		780		
60	180	1140	60	180	1155	60	180	1140
No		No		No		No		
700		-		880		-		
560		526		560		560		
135		135		135		135		
30		30		30		30		
800 x 1200		800 x 1200		800 x 1200		-		
3256		3248		3277		-		
3224		3217		3245		-		
1622		1622		1622		-		

10.1		10.5		10.1		10.5	
-		-		0.17		0.25	
0.09		0.18		-		0.09	
-		-		0.29		0.25	
0.20		0.07		-		0.20	
5.0		8.0		5.0		8.0	
5.0		8.0		5.0		8.0	
5.5		7.5		5.5		7.5	
Electromagnetic		Electromagnetic		Electromagnetic		-	

4		4		4		-	
3		3		3		-	
no		no		no		-	
24	500	24	620 □	24	620 □	24	620 □
370		485		485		-	
2.28	2.35	2.30	2.38	2.38	2.38	2.38	2.38

AC-Controller		AC-Controller		AC-Controller		-	
---------------	--	---------------	--	---------------	--	---	--

< 70		< 70		< 70		-	
------	--	------	--	------	--	---	--

HYSTER		HYSTER		HYSTER		HYSTER		HYSTER	
K1.0L AC 1.9 SL ◆		K1.0L AC 1.9 WP †		K1.0L AC 4.8 SL ▲		K1.0L AC 4.8 WP ◆		K1.0L AC 4.8 WP ◆	
Battery		Battery		Battery		Battery		Battery	
Order-picker		Order-picker		Order-picker		Order-picker		Order-picker	
1		1		1		1		1	
600		600		600		600		600	
166		166		157		166		166	
1390		1390		1510		1510		1510	

1800		2000		2736		2865		2.1	
350	2450	350	2650	1030	2702	1223	2652	2.2	2.2
950	850	950	1050	1523	1213	1755	1120	2.3	2.3

Vulkollan/Vulkollan		Vulkollan/Vulkollan		Vulkollan/Vulkollan		Vulkollan/Vulkollan	
254 x 125		254 x 125		254 x 125		254 x 125	
125 x 94		125 x 94		125 x 94		125 x 94	
1x	2	1x	2	1x	2	1x	2
660		660		830		830	

2270		2270		3075		3075		4.2	
1530		1530		4628		4628		4.4	
3800		3800		6898		6898		4.5	
2270		2270		2270		2270		4.7	
180		180		180		180		4.8	
690		-		690		-		4.11	
1710 ◊		1710 ◊		4080 ◊		4080 ◊		4.14	
80		80		80		80		4.15	
2929		3099		3040		3220		4.19	
1789		1789		1900		1910		4.20	
780		780	996	950		950	996	4.21	
60	180	1140	60	180	1140	60	180	1140	4.22
No		No		No		No		4.23	
700		880		880		880		4.24	
560		560		560		560		4.25	
135		135		135		135		4.31	
30		30		30		30		4.32	
800		1200		800		1200		4.33	
3277		-		3397		-		4.34.1	
3245		3377		3365		3497		4.34.2	
1622		1622		1742		1742		4.35	

10.1		10.5		10.1		10.5		8.6		9.5		8.6		9.5		5.1	
0.11		0.21		0.15		0.20		0.15		0.20		0.15		0.20		5.2	
0.09		0.18		-		-		0.09		0.18		-		-		5.2	
0.26		0.14		0.28		0.24		0.27		0.23		0.28		0.24		5.3	
0.20		0.07		-		-		0.20		0.07		-		-		5.3	
5.0		8.0		5.0		8.0		5.0		8.0		5.0		8.0		5.7	
5.0		8.0		5.0		8.0		5.0		8.0		5.0		8.0		5.8	
5.5		7.5		5.5		7.5		5.5		7.5		5.5		7.5		5.9	
Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic		5.10	

4		4		4		4		6.1		
3		3		3		3		6.2		
no		no		no		no		6.3		
24	620 □	24	620 □	24	620 □	24	620 □	24	620 □	6.4
485		485		485		485		485		6.5
2.40	2.40	2.40	2.86	2.86	2.90	2.90	2.90	2.90	6.6	

AC-Controller		AC-Controller		AC-Controller		AC-Controller		8.1	
---------------	--	---------------	--	---------------	--	---------------	--	-----	--

< 70		< 70		< 70		< 70		10.7	
------	--	------	--	------	--	------	--	------	--

NOTES:
Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

■ **Note for SL model:**
With FEM carriage and forks 80 x 30 mm + 20mm
With FEM carriage and forks 100 x 35 mm + 25mm

* **Note for models with over head guard:**
With lift interrupt mounted on OHG h6+ 80 mm

+ **Note for SL model:**
With FEM carriage and forks 80 x 30mm
h₁₃ = 40mm

○ **Note for SL model:**
With FEM carriage b₂ = 800 mm

▶ **Note for SL model:**
Available also FEM carriage and fork size
80 x 30mm (600 kg @ 600mm,
800 kg @ 500mm, 1 000 kg @ 400mm)
and 100 x 35mm with 1 000 kg @ 600mm

◊ **Note for SL model:**
With FEM carriage b₃ = 800mm

□ **Note for SL model:**
With FEM carriage and forks 80 x 30mm
b₅ = 753mm
With FEM carriage and forks 100 x 35mm
b₅ = 773mm

† With wire guidance l₁ and l₂ + 40mm

▼ These values may vary of +/- 5%
□ Available battery 560Ah. With battery 560Ah service weight -9kg

◆ Model without cabin; the value is referred to the overall height, without load backrest

◇ Models name referred to h12

◆ Available models K1.0L AC 1.9 SL / MO10E AC 19 SL

◆ Available models K1.0L AC 1.9 WP / MO10E AC 19 WP

▲ Available models K1.0L AC 3.2-3.6-4.0-4.4 SL / MO10E AC 32-36-40-44 SL

◆ Available models K1.0L AC 3.2-3.6-4.0-4.4 WP / MO10E AC 32-36-40-44 WP

* Transfer aisle width (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.

△ For models WP -690mm

NOTICE:
Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated.

Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:
This truck conforms to the current EU requirements.

Specification data is based on VDI 2198

MAST INFORMATION – K1.0L, K1.0L SL, K1.0L WP

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

MASTS – 1 STAGE LFL


Lift Height h_2 (mm)	Fork Lift H (mm)	Height, mast lowered h_1 (mm)	Height, mast extended h_4 (mm)	Stand height, elevated h_{12} (mm)
1010	1780	1654	2664	1190
1530	2300 \triangle	2270	3800	1710
1690	2460 \triangle	2270	3960	1870

MASTS – 2 STAGE LFL SL


Lift Height h_2 (mm)	Fork Lift H (mm) \square	Height, mast lowered h_1 (mm)	Height, mast extended h_4 (mm)	Stand height, elevated h_{12} (mm)
3028	3798	2275	5298	3208
3428	4198	2475	5698	3608
3828	4598	2675	6098	4008
4228	4998	2875	6498	4408
4628	5398	3075	6898	4808

TRUCK DIMENSIONS

K1.0L AC 0.7 FC

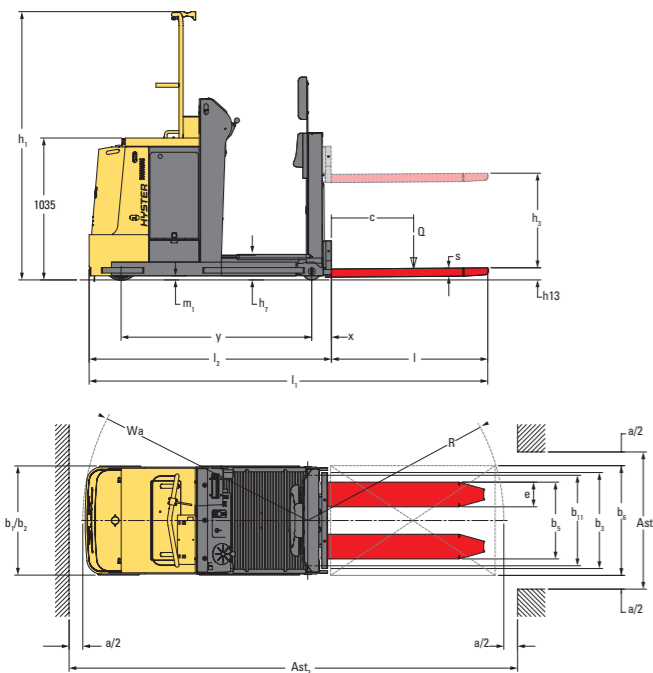


K1.0L AC 1.4 FC

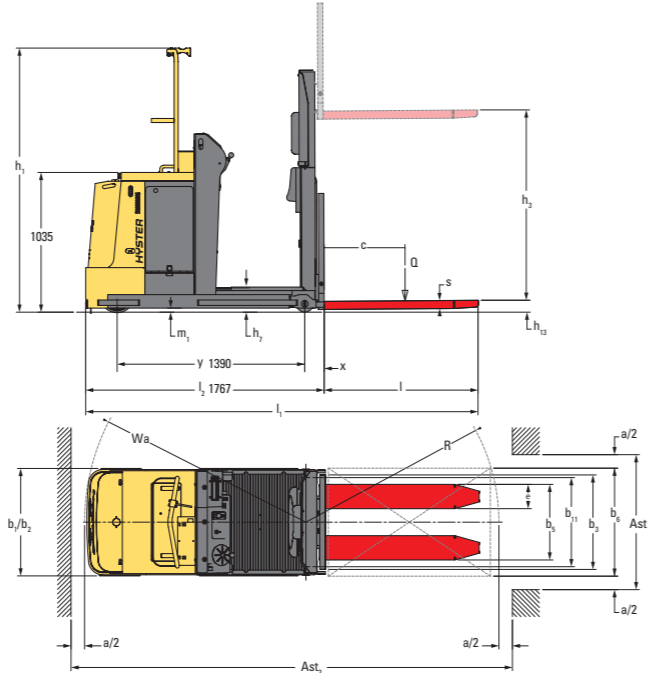


TRUCK DIMENSIONS

K1.0L AC 1.2

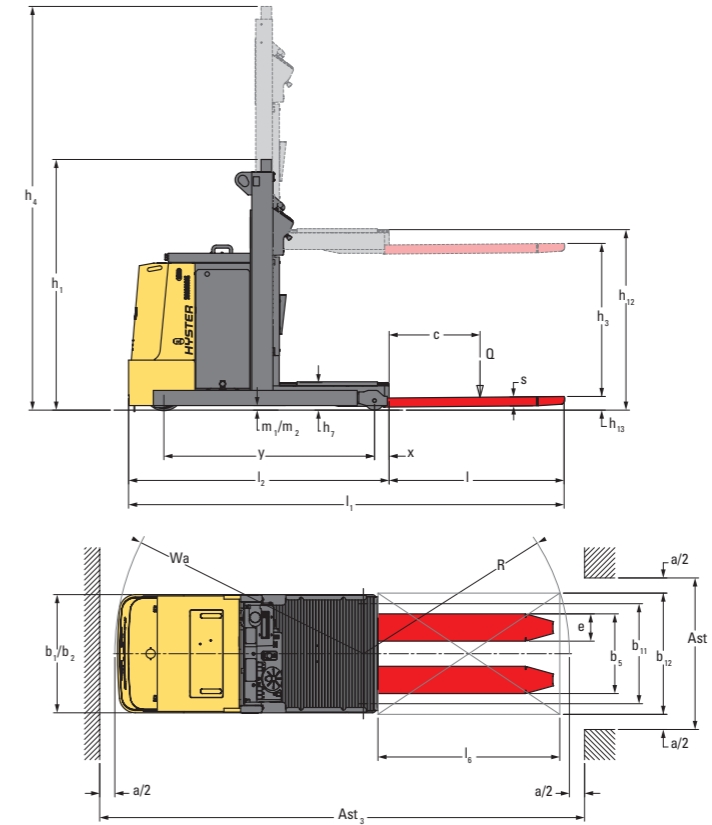


K1.0L AC 1.2 SL

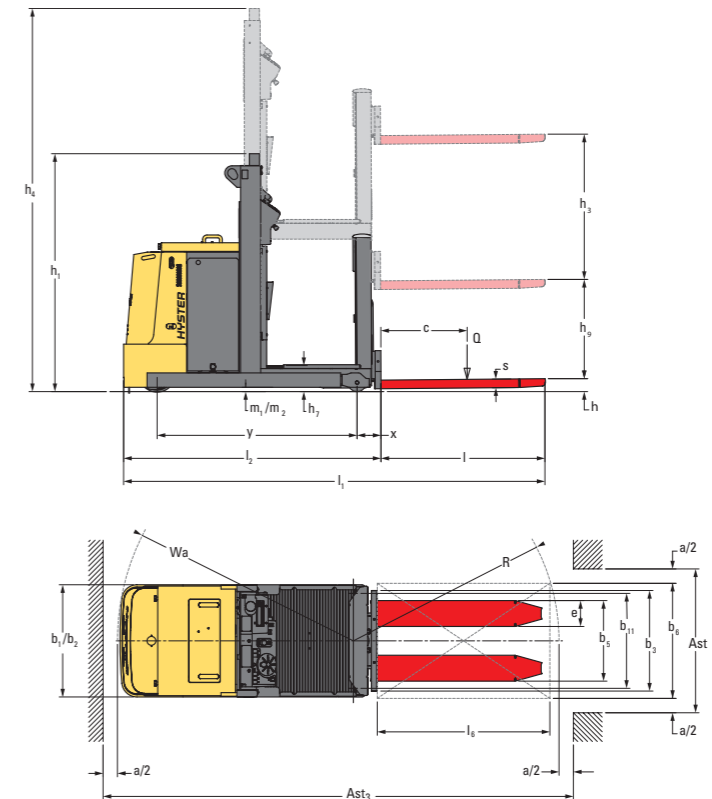


TRUCK DIMENSIONS

K1.0LAC 1.9 SL


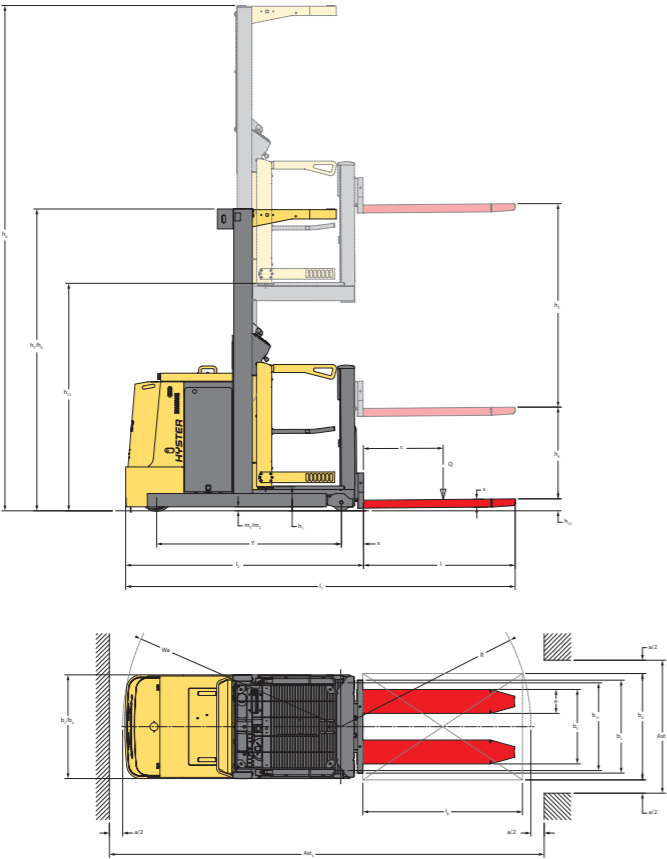


K1.0LAC 1.9 WP

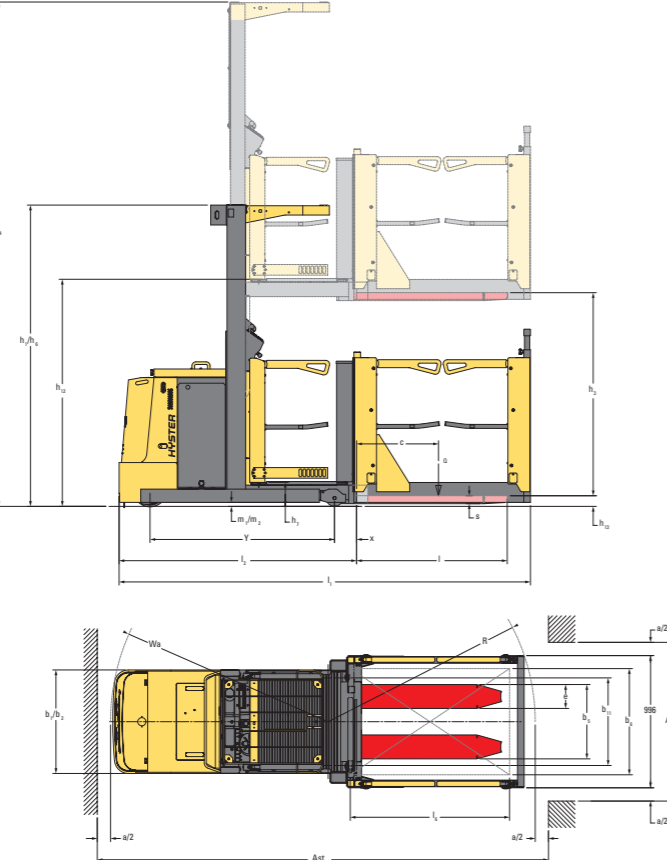


TRUCK DIMENSIONS

K1.0LAC 4.8 SL

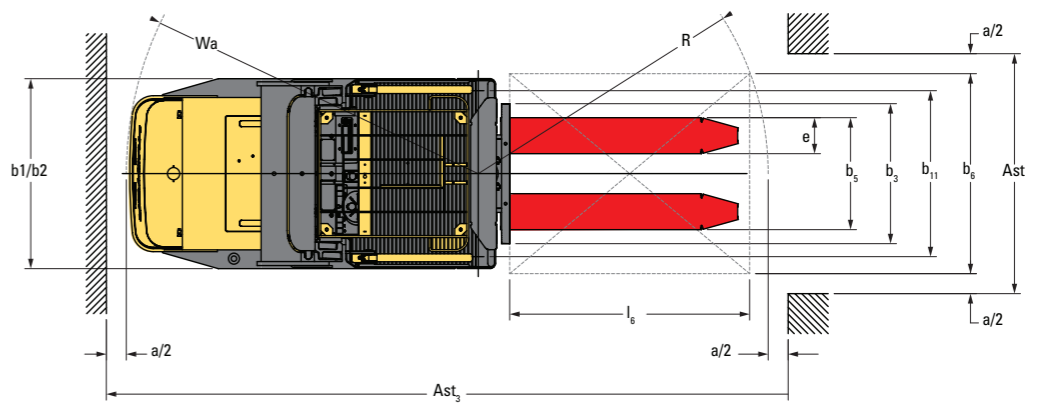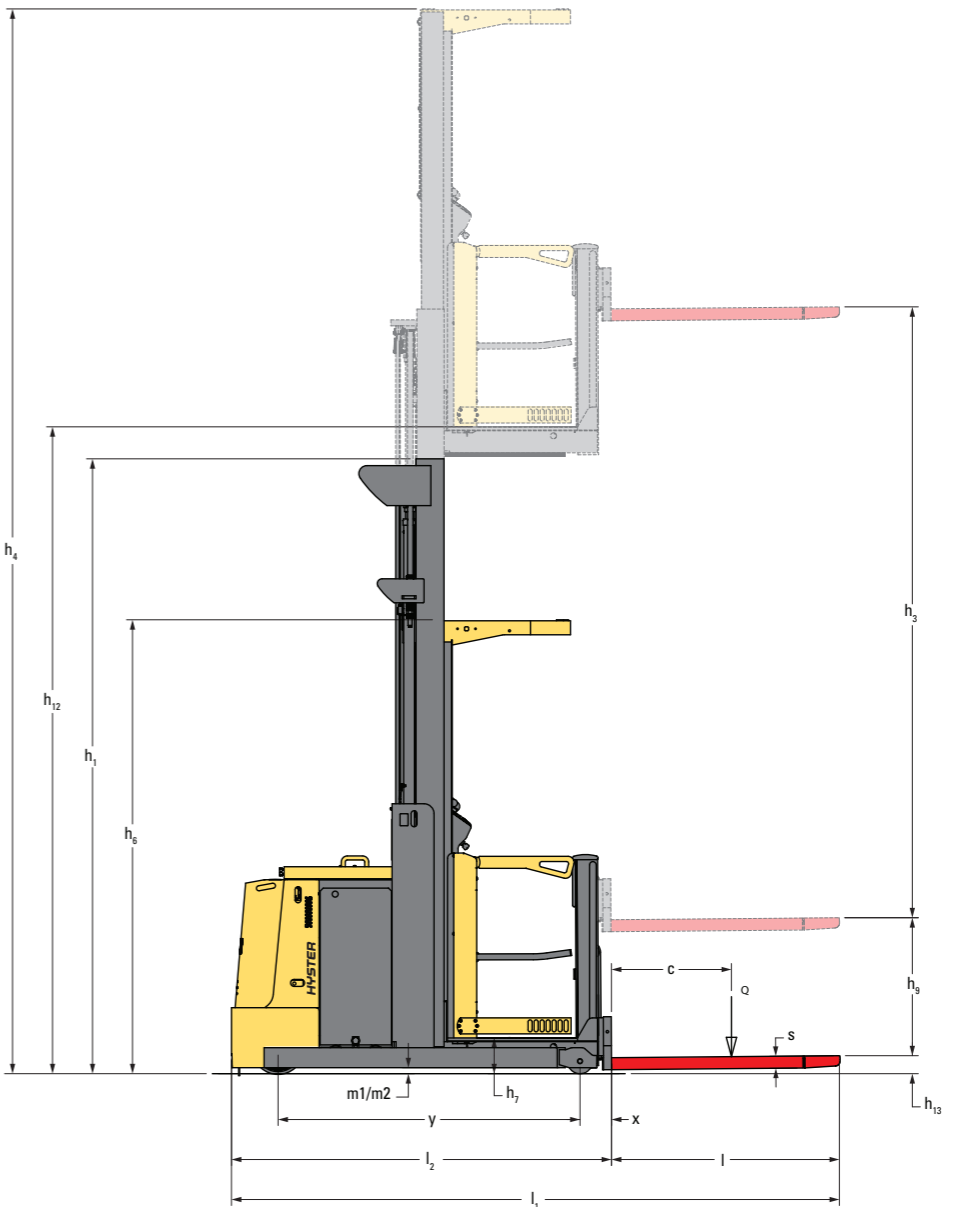

TRUCK DIMENSIONS

K1.0L AC 4.8 WP

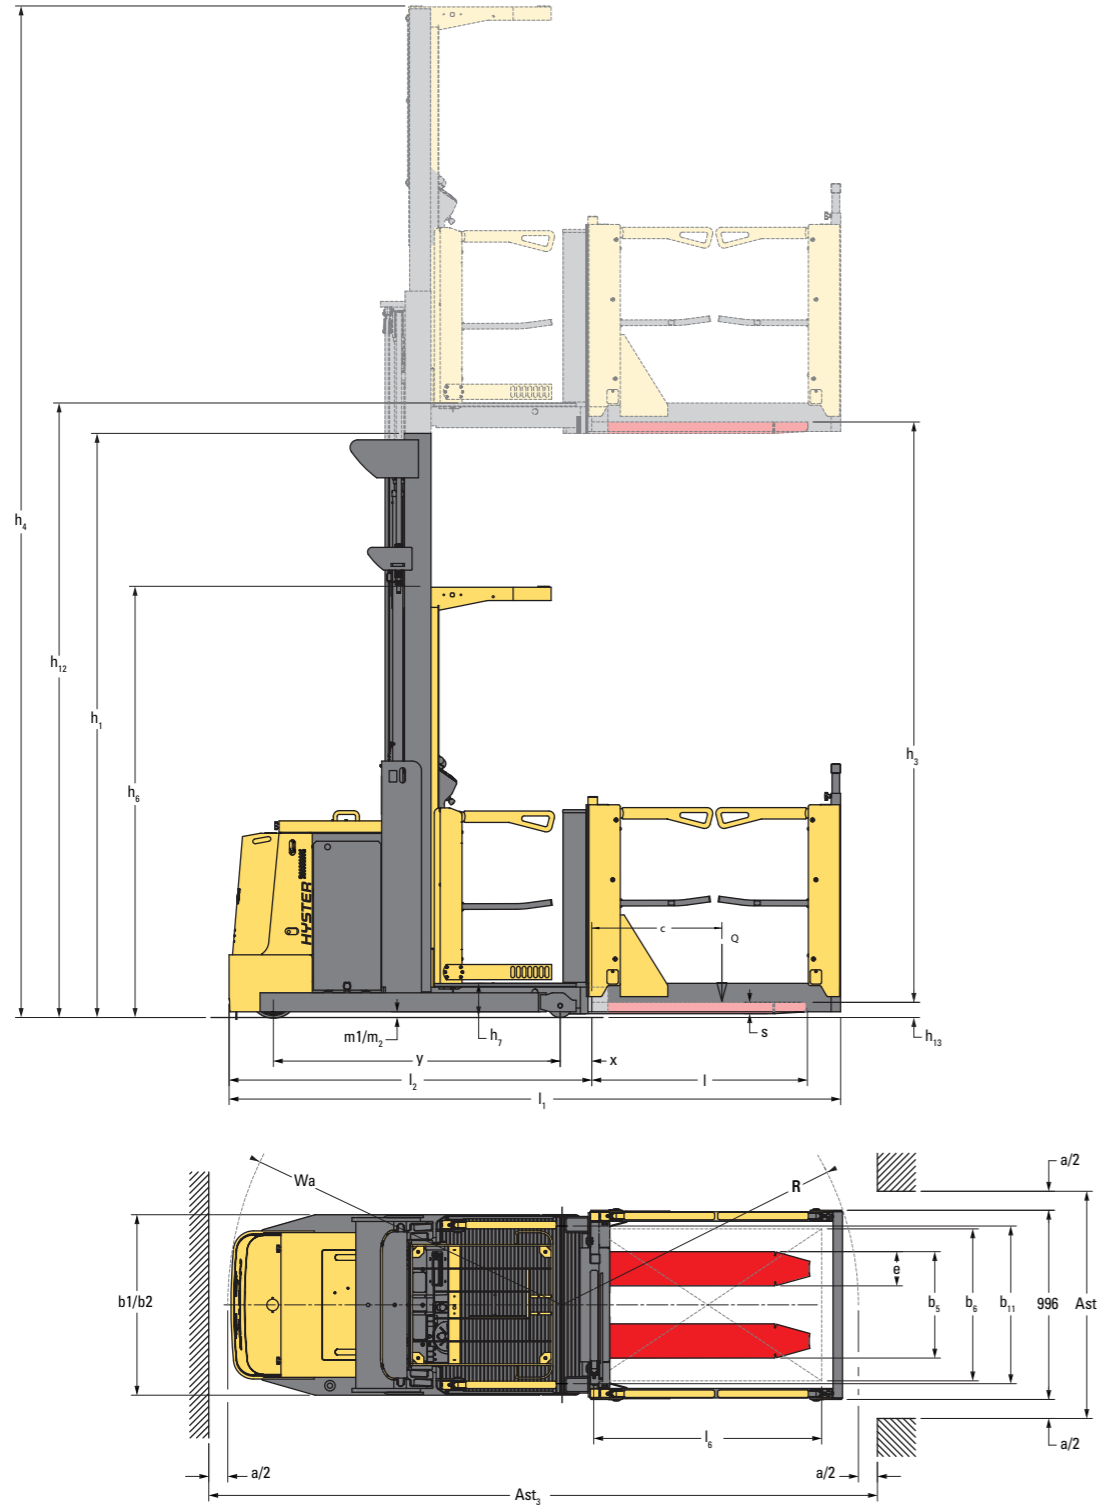

K1.0M, K1.0H

DISTINGUISHING MARKS	1.1	Manufacturer (abbreviation)
	1.2	Manufacturer's type designation
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker
	1.5	Rated capacity / Rated load Q (t)
	1.6	Load centre distance c (mm)
	1.8	Load distance, centre of drive axle to fork x (mm)
	1.9	Wheelbase y (mm)

WEIGHTS	2.1	Service weight ▼	kg
	2.2	Axle loading, laden front/rear	kg
	2.3	Axle loading, unladen front/rear	kg

TYRES / CHASSIS	3.1	Tyres: polyurethane, tophane, vulkollan, front/rear
	3.2	Tyre size, front ø mm x mm
	3.3	Tyre size, rear ø mm x mm
	3.5	Wheels, number front/rear (x = driven wheels)
	3.7	Tread, rear b ₁₁ (mm)

DIMENSIONS	4.2	Height, mast lowered	h ₁ (mm)
	4.3	Free lift <th>h₂ (mm)</th>	h ₂ (mm)
	4.4	Lift <th>h₃ (mm)</th>	h ₃ (mm)
	4.5	Height, mast extended ○ □ <th>h₄ (mm)</th>	h ₄ (mm)
	4.7	Height of overhead guard (cabin) ○ □ <th>h₆ (mm)</th>	h ₆ (mm)
	4.8	Seat height relating to SIP/stand height <th>h₇ (mm)</th>	h ₇ (mm)
	4.11	Additional Lift <th>h₉ (mm)</th>	h ₉ (mm)
	4.14	Stand height, elevated <th>h₁₂ (mm)</th>	h ₁₂ (mm)
	4.15	Height, lowered ▽ <th>h₁₃ (mm)</th>	h ₁₃ (mm)
	4.19	Overall length ■ <th>l₁ (mm)</th>	l ₁ (mm)
	4.20	Length to face of forks ■ <th>l₂ (mm)</th>	l ₂ (mm)
	4.21	Overall width <th>b₁/ b₂ (mm)</th>	b ₁ / b ₂ (mm)
	4.22	Fork dimensions DIN ISO 2328, class/type A, B <th>s/e/l (mm)</th>	s/e/l (mm)
	4.23	Fork carriage ISO 2328, class/type A, B <td></td>	
	4.24	Fork-carriage width ◇ <th>b₂ (mm)</th>	b ₂ (mm)
	4.25	Distance between fork-arms □ <th>b₃ (mm)</th>	b ₃ (mm)
	4.27	Width across guide rollers <th>b₄ (mm)</th>	b ₄ (mm)
	4.31	Ground clearance, laden, below mast <th>m₁ (mm)</th>	m ₁ (mm)
	4.32	Ground clearance, centre of wheelbase ◆ <th>m₂ (mm)</th>	m ₂ (mm)
	4.33	Load dimension b ₁₂ × l ₁ lengthwise <th>b₁₂ × l₁ (mm)</th>	b ₁₂ × l ₁ (mm)
	4.34.1	Transfer aisle width for pallets 1000mm x 1200mm lengthwise ◆ <th>A_{st} (mm)</th>	A _{st} (mm)
	4.34.2	Transfer aisle width for pallets 1000mm x 1200mm lengthwise ◆ <th>A_{st} (mm)</th>	A _{st} (mm)
	4.35	Turning radius <th>W₁ (mm)</th>	W ₁ (mm)

PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h
	5.2 <td>Lift speed, laden/unladen (Cab)</td> <th>m/s</th>	Lift speed, laden/unladen (Cab)	m/s
	5.2 <td>Lift speed, laden/unladen (SL)</td> <th>m/s</th>	Lift speed, laden/unladen (SL)	m/s
	5.3 <td>Lowering speed, laden/unladen (Cab)</td> <th>m/s</th>	Lowering speed, laden/unladen (Cab)	m/s
	5.3 <td>Lowering speed, laden/unladen (SL)</td> <th>m/s</th>	Lowering speed, laden/unladen (SL)	m/s
	5.7 <td>Gradeability, laden/unladen</td> <th>%</th>	Gradeability, laden/unladen	%
	5.10 <td>Service brake</td> <td></td>	Service brake	

POWER UNIT	6.1	Drive motor S2 60 minute rating	kW
	6.2 <th>Lift motor, S3 15% rating</th> <th>kW</th>	Lift motor, S3 15% rating	kW
	6.3 <th>Battery according to DIN 43531/35/36 A,B,C, no</th> <td></td>	Battery according to DIN 43531/35/36 A,B,C, no	
	6.4 <th>Battery voltage/nominal capacity K5</th> <th>(V)/(Ah)</th>	Battery voltage/nominal capacity K5	(V)/(Ah)
	6.5 <th>Battery weight ▼</th> <th>kg</th>	Battery weight ▼	kg
	6.6 <th>Energy consumption according to VDI cycle</th> <th>kWh/h @ Nr of Cycles</th>	Energy consumption according to VDI cycle	kWh/h @ Nr of Cycles

DRIVE / LIFT MECHANISM	8.1	Type of drive unit
	10.7 <th>Sound pressure level at the driver's seat</th>	Sound pressure level at the driver's seat

ADDITIONAL DATA	10.7	Sound pressure level at the driver's seat

HYSTER	HYSTER	HYSTER
K1.0M	K1.0H	K1.0H
Battery	Battery	Battery
Order-picker	Order-picker	Order-picker
1	1	1
600	600	600
190	150 +	205 + +
1534.5	1574.5	1674.5

2890	3259	4073
1060	2830	1509
1650	1240	1942
		2750
		1763
		3310
		2204
		1869

Vulkollan/Vulkollan	Vulkollan/Vulkollan	Vulkollan/Vulkollan
343 x 140	343 x 140	343 x 140
200 x 80	200 x 80	200 x 100
1 x	2	1 x
		2
877	977	1057

3070	3320	3720
-	-	-
4670	5170	8895
7040	7540	11265
2370	2370	2370
250	250	250
770	770	770
4920	5420	9145
80	80	80
3087	3087	3242
1947	1947	2102

1000	1000	1100	1100	1100	1200
60	180	1140	60	180	1140
No	No	No	No	No	No
780 ◆	780 ◆	780 ◆	780 ◆	780 ◆	780 ◆
560 +	560 +	560 +	560 +	560 +	560 +
1130 *	1230 ▲	1430			
80	80	80			
60	60	60			
800 x 1200	800 x 1200	800 x 1200			
4737	4816	5015			
4721	4800	4999			
1757	1797	1897			

8.8	9.0	8.8	9.0	8.8	9.0
0.35	0.42	0.31	0.42	0.31	0.42
0.22	0.24	0.2	0.24	0.2	0.24
0.37	0.37	0.38	0.38	0.38	0.38
0.14	0.12	0.14	0.12	0.14	0.12
6.3		6.2		5.8	
Electromagnetic		Electromagnetic		Electromagnetic	

6.4	6.4	6.4
12	12	12
No	DIN 43531 B	DIN 43531 B
48	310 ◆	48
		465 ●
541		48
		620 ○
3.27		746
		937
		3.27



AC-Controller	AC-Controller	AC-Controller
---------------	---------------	---------------

59	59	59
----	----	----

Specification data is based on VDI 2198

TRUCK DIMENSIONS

K1.0M-K1.0H

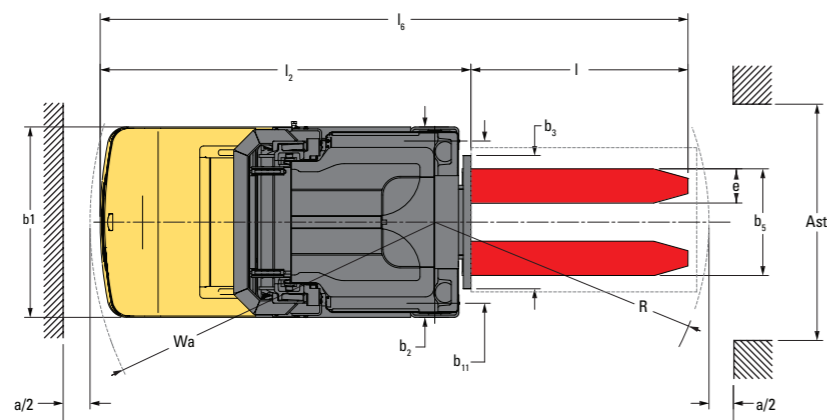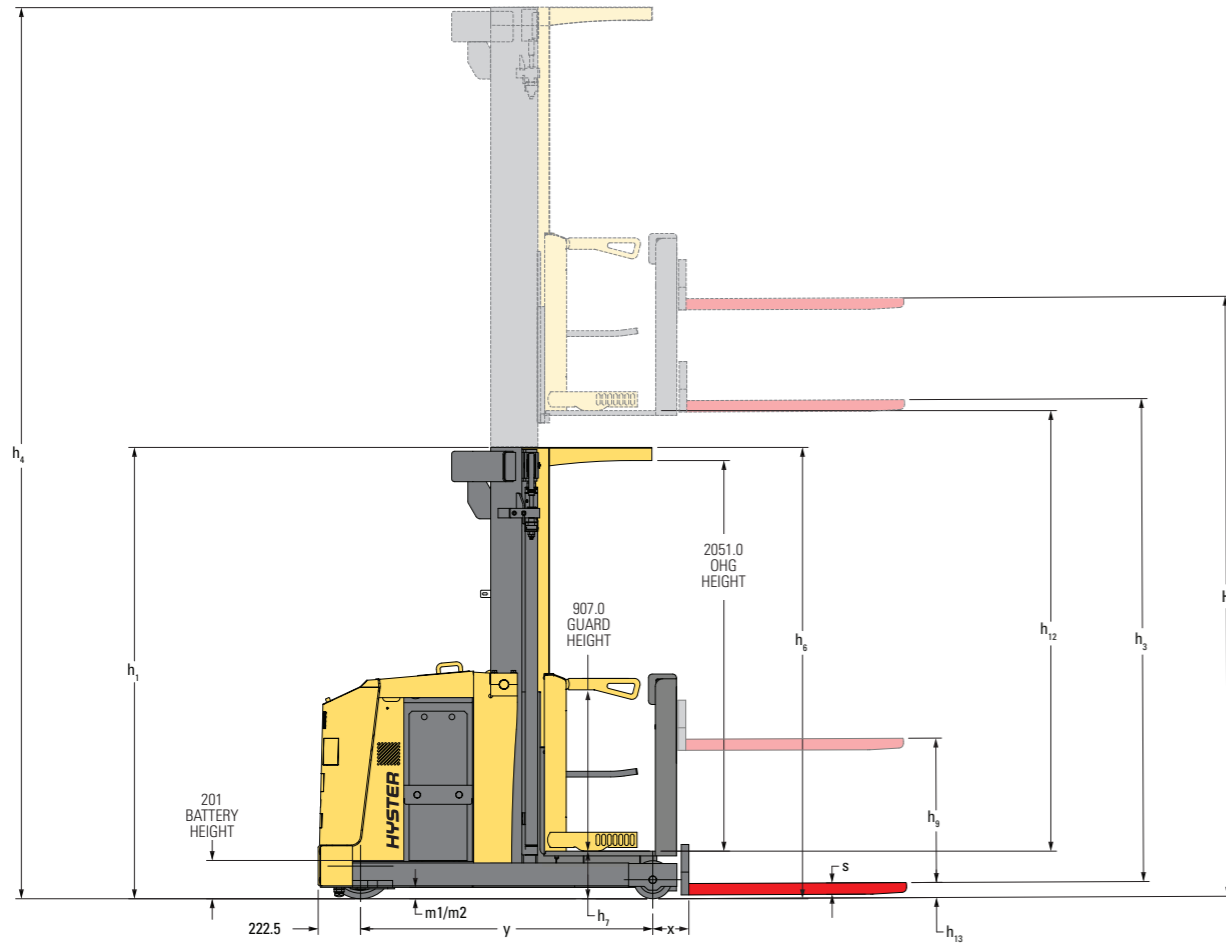

MAST INFORMATION – K1.0M, K1.0H

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

MASTS – 2 STAGE SL

Lift Height h_2 (mm)	Fork Lift H (mm) Δ	Height, mast lowered h_1 (mm)	Height, mast extended h_4 (mm)	Stand height, elevated h_{12} (mm)
3270	4120	2370	5640	3520
3370	4220	2420	5740	3620
3470	4320	2470	5840	3720
3570	4420	2520	5940	3820
3670	4520	2570	6040	3920
3770	4620	2620	6140	4020
3870	4720	2670	6240	4120
3970	4820	2720	6340	4220
4070	4920	2770	6440	4320
4170	5020	2820	6540	4420
4270	5120	2870	6640	4520
4370	5220	2920	6740	4620
4470	5320	2970	6840	4720
4570	5420	3020	6940	4820
4670	5520	3070	7040	4920
4770	5620	3120	7140	5020
4870	5720	3170	7240	5120
4970	5820	3220	7340	5220
5070	5920	3270	7440	5320
5170	6020	3320	7540	5420
5270	6120	3370	7640	5520
5370	6220	3420	7740	5620
5470	6320	3470	7840	5720
5570	6420	3520	7940	5820
5670	6520	3570	8040	5920
5770	6620	3620	8140	6020
5870	6720	3670	8240	6120
5970	6820	3720	8340	6220
6070	6920	3770	8440	6320
6170	7020	3820	8540	6420
6270	7120	3870	8640	6520
6370	7220	3920	8740	6620
6470	7320	3970	8840	6720
6570	7420	4020	8940	6820
6670	7520	4070	9040	6920

MAST TABLE-3 STG SL

Lift Height h_2 (mm)	Fork Lift H (mm)	Height, mast lowered h_1 (mm)	Height, mast extended h_4 (mm)	Stand height, elevated h_{12} (mm)
4845	5695 Δ	2370	7215	5095
4995	5845	2420	7365	5245
5145	5995 Δ	2470	7515	5395
5295	6145	2520	7665	5545
5445	6295	2570	7815	5695
5595	6445	2620	7965	5845
5745	6595 Δ	2670	8115	5995
5895	6745	2720	8265	6145
6045	6895	2770	8415	6295
6195	7045	2820	8565	6445
6345	7195 Δ	2870	8715	6595
6495	7345	2920	8865	6745
6645	7495	2970	9015	6895
6795	7645	3020	9165	7045
6945	7795 Δ	3070	9315	7195
7095	7945	3120	9465	7345
7245	8095	3170	9615	7495
7395	8245	3220	9765	7645
7545	8395 Δ	3270	9915	7795
7695	8545	3320	10065	7945
7845	8695	3370	10215	8095
7995	8845	3420	10365	8245
8145	8995 Δ	3470	10515	8395
8295	9145	3520	10665	8545
8445	9295	3570	10815	8695
8595	9445	3620	10965	8845
8745	9595 Δ	3670	11115	8995
8895	9745	3720	11265	9145

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

- With FEM carriage and Forks 100x35 add + 25mm.
- + With TX mast add 55mm
- ++ With DX mast reduce 55mm
- With Lift interrupt mounted on OHG: h_6 e h_4 are increased by 105mm
- With flashing light fitted on Over Head Guard: h_6 e h_4 are increased by 120 mm
- ◆ With Fem like carriage and Forks 80x30 and 100x35 h_{13} = 40 mm
- Available also FEM like carriage and fork size 100x35 with 1000 Kg @ 600 mm
- ◇ With FEM like carriage b3 = 800mm
- With FEM like carriage and Forks 100x35 b_5 max = 773mm.
- ◆ Sensor height 30mm from the ground
- ◇ Additional battery available: 48/280 (541kg)
- ◎ Additional battery available: 48/420 (746kg)
- Additional battery available: 48/560 (937kg)
- ❖ Available 700mm and 860mm
- ◆ Available 520mm, 680mm, 830mm
- * Available 1075mm and 1330mm
- ▲ Available 1175mm and 1430mm
- ▼ These values may vary of +/- 5%
- ◆ Transfer aisle width (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.

Δ For models WP -770 mm

NOTICE:

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated.

Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:

This truck conforms to the current EU requirements.




K1.0H WP

DISTINGUISHING MARKS		HYSTER		HYSTER	
1.1	Manufacturer (abbreviation)	K1.0H WP		K1.0H WP	
1.2	Manufacturer's type designation	Battery		Battery	
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Order-picker		Order-picker	
1.4	Operator type: hand, pedestrian, standing, seated, order-picker	1		1	
1.5	Rated capacity / Rated load	Q (t)		600	
1.6	Load centre distance	c (mm)		162.5	
1.8	Load distance, centre of drive axle to fork	x (mm)		1574.5	
1.9	Wheelbase	y (mm)		1674.5	
WEIGHTS		3343		4161	
2.1	Service weight ▼	kg		1539	
2.2	Axle loading, laden front/rear	kg		2804	
2.3	Axle loading, unladen front/rear	kg		1573	
		3588		2007	
TYRES / CHASSIS		Vulkollan/Vulkollan		Vulkollan/Vulkollan	
3.1	Tyres: polyurethane, tophane, vulkollan, front/rear	343 x 140		343 x 140	
3.2	Tyre size, front	200 x 80		200 x 100	
3.3	Tyre size, rear	1 x		2	
3.5	Wheels, number front/rear (x = driven wheels)	977		1057	
3.7	Tread, rear	b ₁ (mm)			
DIMENSIONS		3320		3470	
4.2	Height, mast lowered	h ₁ (mm)		-	
4.3	Free lift	h ₂ (mm)		-	
4.4	Lift	h ₃ (mm)		5170	
4.5	Height, mast extended ○ ■	h ₄ (mm)		7540	
4.7	Height of overhead guard (cabin) ○ ■	h ₆ (mm)		2370	
4.8	Seat height relating to SIP/stand height	h ₇ (mm)		250	
4.14	Stand height, elevated	h ₁₂ (mm)		5420	
4.15	Height, lowered	h ₁₃ (mm)		80	
4.19	Overall length	l ₁ (mm)		3260	
4.20	Length to face of forks	l ₂ (mm)		1960	
4.21	Overall width	b ₁ / b ₂ (mm)		1100	
4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)		60	
4.23	Fork carriage ISO 2328, class/type A, B	No		No	
4.24	Fork-carriage width	b ₃ (mm)		1080	
4.25	Distance between fork-arms	b ₄ (mm)		560	
4.27	Width across guide rollers	b ₅ (mm)		1230 ●	
4.31	Ground clearance, laden, below mast	m ₁ (mm)		80	
4.32	Ground clearance, centre of wheelbase	m ₂ (mm)		60	
4.33	Load dimension b ₁₂ × l ₁ , lengthwise	b ₁₂ × l ₁ (mm)		1000 × 1200	
4.34	Transfer aisle width □	A _{tr} (mm)		3575	
4.35	Turning radius	W _s (mm)		1798	
PERFORMANCE DATA		8.8		9.0	
5.1	Travel speed, laden/unladen	km/h		0.37	
5.2	Lift speed, laden/unladen (Cab)	m/s		0.43	
5.3	Lowering speed, laden/unladen (Cab)	m/s		0.38	
5.7	Gradeability, laden/unladen	%		-	
5.10	Service brake	Electromagnetic		Electromagnetic	
POWER UNIT		6.4		6.4	
6.1	Drive motor, S2 60 minute rating	kW		12	
6.2	Lift motor S3 15% rating	kW		DIN 43531 B	
6.3	Battery according to DIN 43531/35/36 A,B,C, no	DIN 43531 B		DIN 43531 B	
6.4	Battery voltage/nominal capacity K5	(V)/(Ah)		48	
6.5	Battery weight ▼	kg		465 ●	
6.6	Energy consumption according to VDI cycle	kWh/h @ Nr of Cycles		48	
		746		937	
		3.27		3.27	
DRIVE / LIFT MECHANISM		AC-Controller		AC-Controller	
8.1	Type of drive unit				
ADDITIONAL DATA		< 70		< 70	
10.7	Sound pressure level at the driver's seat				

Specification data is based on VDI 2198

TRUCK DIMENSIONS – K10L AC 48 WP

K1.0H WP

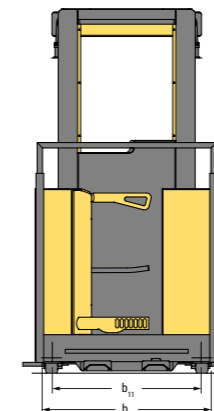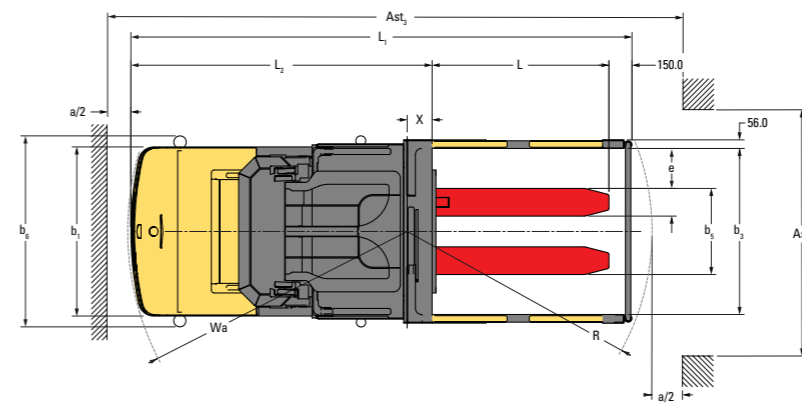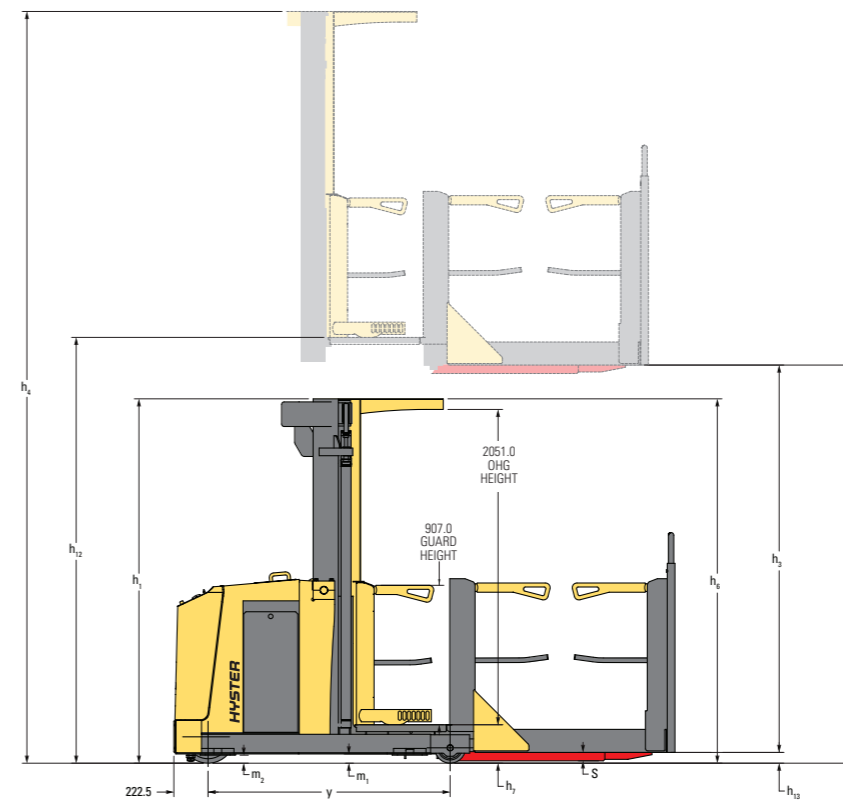

FORKS:

K1.0H WP 60 x 180 x 1 150 mm long

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster Truck.

- With Lift interrupt mounted on OHG: h₆ e h₄ are increased by 105mm
- + With flashing light fitted on Over Head Guard: h₆ e h₄ are increased by 120 mm
- Additional battery available: 48/420 (746kg)
- Additional battery available: 48/560 (937kg)
- ▼ These values may vary of +/- 5%
- Available 1175 mm and 1430 mm
- ◇ Transfer aisle width (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.

△ For models WP -770 mm

NOTICE:

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that the mast tilt in either direction is kept to a minimum when loads are elevated. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:

This truck conforms to the current EU requirements.

STANDARD EQUIPMENT AND OPTIONS

Feature	K1.0L AC 0.7/1.4 FC	K1.0L AC 1.2 SL/WP	K1.0L AC 1.9-4.8 SL/WP	K1.0M SL/WP	K1.0H SL/WP
OPERATOR COMPARTMENT					
Drive side facing controls	x	x	x	x	x
Dual drive and load side facing controls	-	-	-	o	o
Electric power steering	x	x	x	x	x
Floor integrated operator presence sensing	x	x	x	x	x
Height indicator	x	x	x	x	x
Storage compartments	x	x	x	x	x
Open operator's compartment - raised floor height (h ₁₂) < 1200mm	-	x	-	-	-
Enclosed operator's compartment - front and sides	-	-	x	x	x
Fold-up bottom toe plate on side gates (enclosed compartment only)	-	-	x	x	x
LIFT AND TRACTION CONTROL					
Proportional lift/lower control	-	-	x	x	x
Soft stop on lowering	-	-	-	x	x
Emergency lowering from the ground	-	-	x	x	x
Driver select performance settings on traction and lift	x	x	x	x	x
Walk along slow speed advance control from side of truck	x	x	x	x	x
Off board lift / lower control of forks	x	x	x	x	x
LOAD HANDLING					
Walk-on forks - open	-	x (WP)	-	-	-
Walk-on forks - pallet cage with fold-up side-gates / pallet sensing	-	-	x (WP)	-	o
Welded fixed forks - walk-on pallet option	-	x (WP)	x (WP)	-	o
Supplementary lift - fixed fork width	o (0.7 FC)	o (SL)	o (SL)	o	o
Supplementary lift - adjustable fork width	o (0.7 FC)	o (SL)	o (SL)	o	o
Masted lift - fixed fork width	o (1.4 FC)	-	-	-	-
Masted lift - adjustable width forks	o (1.4 FC)	-	-	-	-
Load backrest	o	-	-	-	-
TRAVEL					
Free ranging	x	x	x	x	x
Speed reduction on cornering	x	x	x	x	x
Height / load sensing speed control	-	-	-	x	x
Guide trollers for rail guidance (rail not included)	-	-	o ✓	o	o
Wire guidance (5.2 / 6.25 / 7.0 / 10 kHz)	-	-	o ✓	o	o
End of aisle control options (slow down / stop) via floor magnets	-	-	o ✓	o	o
OPTIONS					
Flashing beacon	o	o	o □	x	x
Dome light	-	-	o	o	o ▲
Fan	-	-	o	-	-
Dome light and fan	-	-	-	o	o
Work lights - facing racks	-	-	o	o	o
Work light - over load	-	-	o	o	o
Lexan overhead guard	-	-	o	o	o
Wire mesh overhead guard	-	-	o	o	o
Lift interrupt with override	-	o	o	o	o
Lift interrupt on overhead guard	-	-	o	o	o
Autostop on lowering (only for SL application)	-	-	-	o	o
Reverse alarm	o	o	o	o	o
Cold store protection	o	o	o	o	o
Clipboard	o	-	o	o	o
RFID hang -on support	o	-	o	o	o
DC/DC converter 12V	o	o	o	o	o
DC/DC converter 24V	-	-	-	o	o
Antistatic drive tyre	-	-	-	o	o
CONFIGURATION					
Cabin width (mm)	796	780	940	950	1050 - 1150 - 1240 +
Chassis width b ₂ (mm)	796	780	950	1000	1100-1200 ▼
Fixed cab / supplementary lift - 690 mm	K1.0L AC 0.7 FC	o	o	-	-
Fixed cab / masted fork lift - 1410 mm	K1.0L AC 1.4 FC	-	-	-	-
Rising cab 1 stage mast - raised platform height (h ₁₂) = 1190 mm	-	x	-	-	-
Rising cab 1 stage mast - raised platform height (h ₁₂) = 1690 - 1850 mm	-	-	o	-	-
Rising cab 2 stage mast - raised platform height (h ₁₂) = 3207 - 4807 mm	-	-	o	-	-
Rising cab 2 stage mast - raised platform height (h ₁₂) = 3520 - 4520 mm	-	-	-	o	-
Rising cab 2 stage mast - raised platform height (h ₁₂) = 3520 - 6920 mm	-	-	-	-	o
Rising cab 3 stage mast - raised platform height (h ₁₂) = 5095 - 9145 mm	-	-	-	-	o 6
POWER					
AC traction	x	x	x	x	x
AC steering	x	x	x	x	x
AC pump motor	-	-	-	x	x
Voltage	24	24	24	48	48
Battery size (Ah)	500	560-620	560-620	280-310	420-620
Regen on lowering	-	-	-	x	x
Battery rollers	x	x	x	x	x
Side battery change table - single bed	o	o	o	o	o
Side battery change table - twin bed	o	o	o ◀	-	-

NOTE:

✓ With 2 stage mast only (Raised platform height (h ₁₂) = 3200-4800 mm)	+ With walk-on pallet cage - 1140 / 1340 mm
□ Required option (Raised platform height (h ₁₂) > 1200 mm)	▼ From raised platform height (h ₁₂) = 8450 mm, 1200 mm chassis required
▲ With 2 stage mast only	◀ Not with rail guidance

PRODUCT FEATURES

DEPENDABILITY

- Strong, welded compact chassis structure enhances maneuverability and allows reliable load handling even in high racking.
- Robust mast construction, with high torsional strength promotes increased stability, leading to greater operator confidence and safer load handling.
- A slack chain detection device, mounted on the mast, prevents further lowering if an obstacle is encountered. This promotes safe operation and minimizes truck damage.
- Polyurethane tyres minimize pressure applied on the floor surface and promote more stable load handling.

LOW COST OF OWNERSHIP

- Extensive range of range of lifting heights optimizes warehouse space.
- AC drive motor on K1.0L, K1.0H and K1.0M provides superior performance and productivity.
- Progressive speed control helps optimize efficient energy consumption.
- Parts commonality with other Hyster warehouse models reduces the level of parts required to be held in stock. Familiarity with key components reduces service costs.
- Service intervals of 12 months or 1 000 hours.

PRODUCTIVITY

- A choice of three performance settings allows the truck to be configured to suit the requirements of the driver and the application.
- Automatic braking on cornering improves controllability.
- Variable lift speeds allow the truck's hydraulic performance to be matched to the dimensions and weight of the load.

- The MOSFET high frequency controller provides good traction and hydraulic control for smooth acceleration and lift performance with optimum energy efficiency.
- Compact chassis design enhances manoeuvrability.

ERGONOMICS

- Spacious compartment allows the operator more freedom of movement, leading to more comfortable operation.
- A low step height allows easy on/off access, reducing operator fatigue during stop and go operations.
- Full platform sensing for operator presence.
- Electronic fly-by-wire, effortless power steering.
- The forks can be raised or lowered independently from the cab, according to the required operator working heights, thus minimizing the need for the operator to stretch (not applicable to WP models).
- Rising cab with proportional lowering (not applicable to FC models).
- Supplementary lift and walk-on pallet cage also available.
- Front, side and overhead guards are available for operator protection (depending on model).
- Easy access to pick faces.

SERVICEABILITY

- Fixed vertically mounted motor provides easy maintenance access.
- AC drive motor is virtually maintenance free.
- CANbus wiring system enhances communication between truck systems and simplifies maintenance.
- Dashboard display provides full information on the truck performance and operating status.
- Universal support bracket

STRONG PARTNERS. TOUGH TRUCKS.™

FOR DEMANDING OPERATIONS, EVERYWHERE.

Hyster supplies a complete range of warehouse equipment, IC and electric counterbalanced trucks, container handlers and reach stackers. Hyster is committed to being much more than a lift truck supplier.

Our aim is to offer a complete partnership capable of responding to the full spectrum of material handling issues: Whether you need professional consultancy on your fleet management, fully qualified service support, or reliable parts supply, you can depend on Hyster.

Our network of highly trained dealers provides expert, responsive local support. They can offer cost-effective finance packages and introduce effectively managed maintenance programmes to ensure that you get the best possible value. Our business is dealing with your material handling needs so you can focus on the success of your business today and in the future.



HYSTER EUROPE

Centennial House, Frimley Business Park, Frimley, Surrey, GU16 7SG, England.

Tel: +44 (0) 1276 538500



www.hyster.eu



infoeurope@hyster.com



[/HysterEurope](https://www.facebook.com/HysterEurope)




[@HysterEurope](https://twitter.com/HysterEurope)




[/HysterEurope](https://www.youtube.com/HysterEurope)



HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

HYSTER,  and FORTENS are registered trademarks in the European Union and certain other jurisdictions.

MONOTROL® is a registered trademark, and DURAMATCH and  are trademarks in the United States and in certain other jurisdictions.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment.