


R30XMS₃ SERIES




TECHNICAL GUIDE
Standard OrderPicker

R30XMS₃ DIMENSIONS

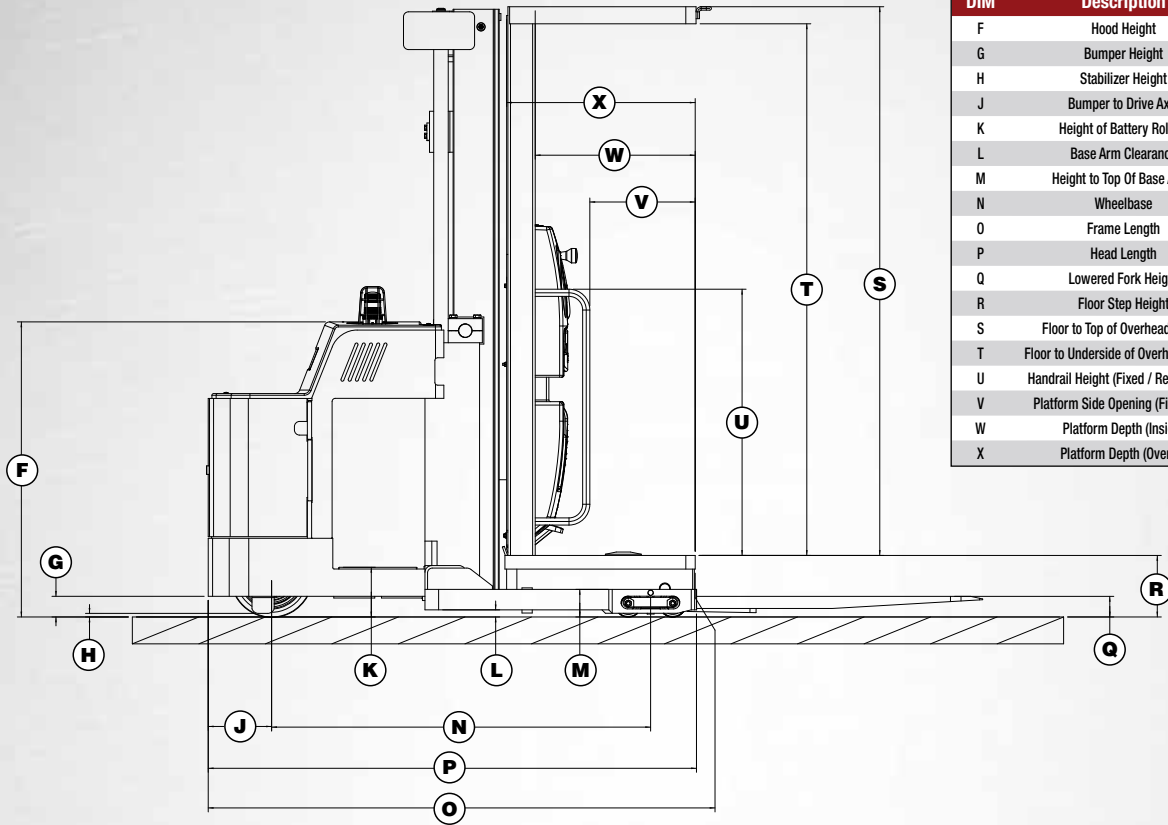

DIM	Description	Value in. (mm)
F	Hood Height	43.1 (1096)
G	Bumper Height	3.0 (76)
H	Stabilizer Height	0.5 (12.4)
J	Bumper to Drive Axle	9.3 (236)
K	Height of Battery Rollers	7.2 (184)
L	Base Arm Clearance	1.0 (26)
M	Height to Top Of Base Arms	4.0 (102)
N	Wheelbase	55.5 (1410)
O	Frame Length	71.52 (1817)
P	Head Length	71.3 (1812) / 72.3 (1837)
Q	Lowered Fork Height	3.0 (76)
R	Floor Step Height	9.0 (228)
S	Floor to Top of Overhead Guard	80.4 (2042)
T	Floor to Underside of Overhead Guard	77.9 (1978)
U	Handrail Height (Fixed / Retractable)	39.0 / 39.2 (990 / 995)
V	Platform Side Opening (Fixed Rail)	15.4 (392)
W	Platform Depth (Inside)	23.4 (595)
X	Platform Depth (Overall)	27.6 (702)

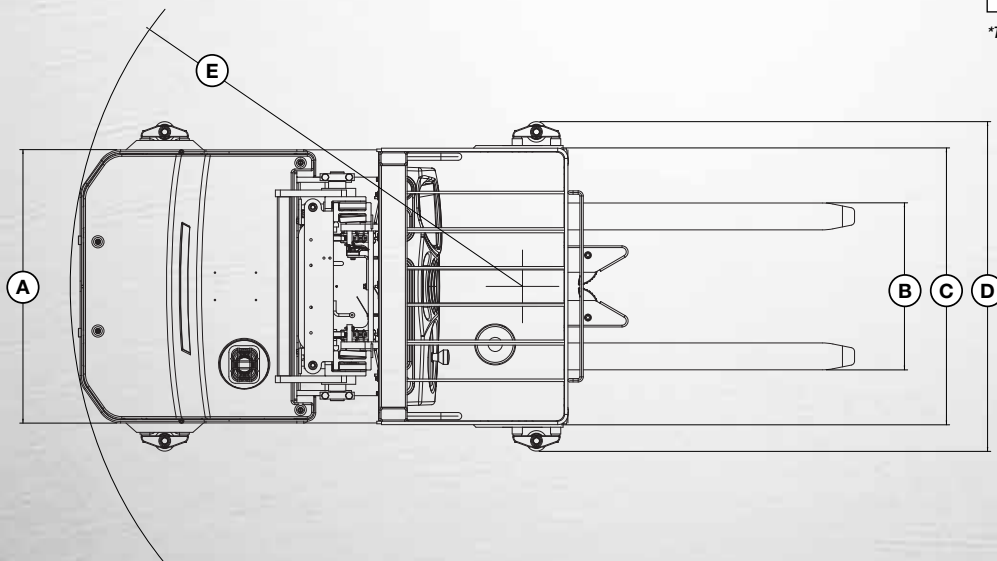

DIM	Description	Value in. (mm)
A	Frame Width	40 (1016)
B	Fork Width	20.9 to 28.0 (530 to 711)
C	Platform Width	40.2 (1022)
D	Overall Width (w/o Guide Rollers) / Overall Width (with Guide Rollers)	41.3 (1048) / 48.0 (1219) / 48.3 (1226) / 55.0 (1397)
E	Turning Radius*	66.2 (1681)

*Turning Radius is the same with or without guide rollers

R30XMS₃ SPECIFICATIONS


GENERAL	1		Manufacturer	HYSTER	
		2		Model Designation	R30XMS ₃
	3		Power / Voltage	Electric / 24 Volts	
	4		Operation Type	Stand-up	
	5		Rated Capacity	lb. (kg) 3000 (1361)	
	6		Load Center	in. (mm) 24 (609)	
	7		Tire Type, front / rear	load / drive Poly / Poly	
	8		Wheels (X=driven)	front / rear 4 / (1X)	
DIMENSIONS	9		Mast – 2-Stage / 3-Stage (TOF)	in. (mm) See Mast Chart	
	10		Operator Clearance Height	in. (mm) 77.9 (1978)	
	11		Forks, Width / Thickness	in. (mm) 4 / 1.75 (102 / 45)	
	12		Fork Spread, Inside to Inside	Minimum / Maximum in. (mm) 13 / 20 (330 / 508)	
	13		Fork Spread, Outside to Outside	Minimum / Maximum in. (mm) 21 / 28 (533 / 710)	
	14		Top of Fork, Mast Lowered	in. (mm) 3 (76)	
	15		Head Length, length to face of operator deck	2-Stage / 3-Stage in. (mm) 71.3 / 72.3 (1812 / 1837)	
	16		Base Width 41" / width across guide rollers	in. (mm) 41.3 / 48.3 (1048 / 1226)	
	17		Base Width 48" / width across guide rollers	in. (mm) 48 / 55 (1219 / 1397)	
	18		Height, Standard 2 Stage Mast Lowered	in. (mm) 89 (2261)	
PERFORM.	19		Operator Platform Size	Width / Depth in. (mm) 40 / 27.5 (1016 / 698)	
	20		Turning Radius, minimum outside	in. (mm) 66.2 (1681)	
	21		Stacking Aisle, Zero Clearance	2 Stage / 3 Stage in. (mm) 120.6 / 121.7 (3063 / 3091)	
	22		Intersecting Aisle, equal aisles 40" x 48" pallet	w/o Guide Rollers in. (mm) 69.92 (1780)	
	23		Stability, Comply with ANSI?	YES	
	24		Travel Speed *	NL / RL mph (km/h) 6 / 6 (9.6 / 9.6)	
	25		Lift Speed	NL / RL ft/min See Performance Chart	
	26		Lower Speed	NL / RL ft/min See Performance Chart	
	WT.	27		Truck Weight	Without Battery NL lb. (kg) 4266 (1935)
		28		Axle Loading - Drive	Static with Max. Wt. Battery NL / RL lb. (kg) 3283 / 2282 (1489 / 1035)
29		Axle Loading - Load Wheels	Static with Max. Wt. Battery NL / RL lb. (kg) 2183 / 6184 (990 / 2805)		
WHEELS/TIRES	30		Tire Size, Drive	in. (mm) 12 / 5.5 (305 / 140)	
	31		Tire Size, Loadwheel	in. (mm) 4.0 / 3.0 (102 / 76)	
	32		Wheelbase	in. (mm) 55.5 (1410)	
	33		Ground Clearance	No load , lowest point in. (mm) 0.5 (14)	
ELECTRIC	34		Ground Clearance	No load , center wheelbase in. (mm) 1 (25.4)	
	35		Brakes, Method of Control	Service / Parking Foot	
	36		Brakes, Method of Operation	Service / Parking Spring Applied / Electric Released	
	37		Battery	Type Lead Acid	
	38			Volts 24	
	39			Minimum Weight lb. (kg) 900 (408)	
	40		Traction Motor Control Method	AC Transistor	
	41		Pump Motor Control Method	Contacttor	
42		Number of Travel Speeds	Infinitely Variable		

Right Angle Stack and Equal Intersecting Aisle dimensions provided with a 40" wide x 48" long pallet load, allowing zero clearance.

*Speeds are the same in either direction, with or without rated load. Steer angle <10 degrees.

CERTIFICATION: These Hyster® lift trucks meet design specifications of Part II ANSI B56.1-1969, as required by OSHA Section 1910.178(a)(2) and also comply with Part III ANSI B56.1-revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck. Performance specifications are for a truck equipped as described under Standard Equipment on this Technical Guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature, condition of the operating area, proper service and maintenance of the vehicle. If these specifications are critical, the proposed application should be discussed with your dealer.

Battery Specifications							
Number of Cells	Cell Size	Plates per Cell	Capacity 6 Hr Rate amp hr (kwh)	Battery Dimensions			Weight lb. (kg)
				"X" (Width) in. (mm)	"Y" (Length) in. (mm)	"Z" (Height) in. (mm)	
12	85	15	595 (13.9)	35.2 (895)	12.9 (327)	23.2 (589)	1130 (513)
12	100	15	700 (16.4)	35.2 (893)	12.9 (327)	23.1 (586)	1240 (562)
12	110	15	770 (18.0)	35.2 (893)	12.9 (327)	23.2 (590)	1200 (544)



Battery Compartment Length is measured from front to rear. Battery Compartment Width is measured across truck. SB175 Amp "Red" Connector, Cable Position B, Cable Length 16" (405mm). Maximum Cable Gauge 1/0 AWG. Battery with lid will NOT fit in battery compartment. Amp Hour Capacity Min / Max 24 Volt truck 560 / 770. Battery Weight Range Min / Max 900 - 1200 lbs.

Travel Speeds (24V)		
Fork Height in (mm)	Steer Angle <10° mph (kph)	Steer Angle >10° mph (kph)
0 (0)	6.0 (9.7)	6.0 (9.7)
24 (610)	6.0 (9.7)	3.0 (4.8)
60 (1524)	6.0 (9.7)	2.4 (3.9)
116 (2946)	2.7 (4.3)	1.5 (2.4)
150 (3810)	1.0 (1.6)	1.0 (1.6)
>150 (3810)	No Travel*	No Travel*

Note: Speed limits are for trucks at operating temperature with fully charged battery. Speeds are the same in either direction, with or without rated load.

For lift heights between 24.0" (610 mm) and 150.0" (3810 mm), traction speed is reduced when steering angle exceeds 10°.

* Travel above 150.0" (3810 mm) fork height requires a High level traction option. Capacity reduction required.

Contact your local dealer for additional information.

STANDARD FEATURES AND OPTIONS

STANDARD EQUIPMENT

- 135" MFH / 89" OALH 2-Stage Anti-Rattle Mast
- 40.0" Wide X 27.5" Deep Operator Platform
- 42.0" x 1.75" x 4.0" Standard Taper Pin Type Forks
- 12.0" x 5.5" Black Polyurethane Drive Tire
- 4.0" x 3.0" Articulating Tandem - High Load Compound Load Wheel
- 36.0" L x 13.5" W x 25.0" H Battery Compartment
- 175 Amp Red, Position B - 16" Lead Length Battery Connector
- 24 Volt AC Electrical System
- Standard Application / Environmental Construction
- 41" Outside Dimension (Base Width) Basearms
- UL Classification Type "E"
- Key Switch Start
- Return to Center Steering
- Ergonomically Advanced Multi-Function Control Handle with Rotational Adjustment and Single Speed Lift/Lower
- Electric Park Brake - Automatically Engaged / Foot Released
- Heavy Duty Pallet Clamp - Automatically Engaged / Foot Released
- AC Transistor Control
- AC Traction Motor
- Single Hydraulic Pump and Motor
- Controller Area Network (CANbus) Communications
- On Demand Electric Power Steering
- AC Steer Motor
- Auto Deceleration System (ADS) with Regenerative Braking
- Graphic LCD Multi-Function Smart Display with Back Lighting
 - Hour Meters; Truck, Traction and Hoist Pump
 - Bar Graphic Battery Discharge Indicator
 - Low Battery Lift Interrupt
 - Performance Mode Selection and Indication
 - LED Status Indicators with Symbols
 - 4 Operator Selectable, Programmable Performance Modes
 - User Passwords and Operator Logs with History
 - Steer Wheel Angle Graphic Indication
 - Truck Inspection Check List
 - Truck Speed Indication in MPH or KPH
- Cantilever Style Overhead Guard
- Wire Mesh Screen Operator Guard
- Amber LED Strobe - Continuous Operation with Key-on
- HySense Continuous Height Sensing
- Slack Chain Indication
- Shock Dampening Operator's Compartment Floor Mat
- Battery Power Disconnect Button
- Operator Convenience Station with Storage Areas, Trash Bin, Beverage & Clipboard Holders
- Full Body Harness and Operator Tether
- Battery Compartment Corrosive Resistant Steel Rollers
- Fixed Hoop Platform Side Rails
- Electric Horn
- Static Discharge Strap
- Operating Manual and Labels - English
- 12 Month / Unlimited Hours Full Truck Warranty
- 3 Years / 6,000 Hour Powertrain Warranty
- Lifetime Frame Warranty

Mast Performance				
24V	Lifting Speed		Lowering Speed	
	Empty	Rated Load	Empty	Rated Load
	2-Stage	40 ft/min (0.203 m/s)	25 ft/min (0.127 m/s)	52 ft/min (0.264 m/s)
3-Stage	42 ft/min (0.213 m/s)	26 ft/min (0.132 m/s)	60 ft/min (0.305 m/s)	58 ft/min (0.295 m/s)

NOTE: Performance specifications are for truck with Standard Equipment. Performance specifications are affected by the condition of the vehicle and how it is equipped as well as the nature and condition of the operating area. If these specifications are critical, the proposed application should be discussed with your dealer.

OPTIONAL EQUIPMENT

- 175 Amp Gray, Position B - 16" Lead Length
- Battery Spacer Group
- Battery Stand
- Battery Puller
- Application / Environmental Construction
 - Cooler/Freezer Package - Operating Temperatures: 0° F to +120° F
 - SubZERO Freezer Package - Operating Temperatures Range: -20° to +120° F
- 48" Outside Dimension (Base Width) Basearms
- Safety Glass Shield
- Retractable Side Gates with Cushioning and Lift and Traction Cutout Interlock
- 6" Vertical Adjustable Operator Console
- Retractable Operator Tether with Full Body Harness or Medium Body Belt
- Heavy Duty Automatic Pallet Clamp with opening range from 1/2" to 6"
- Keyless - Toggle switch
- Various Mast Options Available
- 36" or 48" Long Standard Taper Pin Type Forks
- Lift Limit without Push Button Override
- Lift Limit with Push Button Override
- Lowering Limit With Push Button Override
- High Level Traction above 150" with Restricted Steer
- Drive Tire
 - Polyurethane - Red Diagonal Grooved (92 Durometer) Press-on
 - Polyurethane - Cream Vulkollan (94 Durometer) Press-on
- Various Guidance Systems
 - Side Guide Rollers
 - Wire Guidance
 - Line Driver
- Various Light Packages
 - Dome Light and 2 Speed Fan Package Mounted on Top of Overhead Guard
 - Dome Light, 2 Speed Fan and Halogen Glass Lens Spot Light Package
 - Dome Light, 2 Speed Fan and LED Plastic Lens Spot Light Package
 - 2 LED Plastic Lens Spot Lights Mounted Under Overhead Guard
- DC to DC Converter - 25 amps / 300 watts @ 12 volts
- Multi-Turn Steering
- Audible Alarms Self Adjusting 82-102 db(A)
 - Back-Up Alarm - Reverse Direction Activation
 - Motion Alarm - Forward and Reverse Direction Activation
 - Motion Alarm - Continuous Operation with Key-on
- 2 Speed Upper Body Fan - Console Mounted
- Parts Manual - Printed or CD

Mast Dimensions			
	Maximum Fork Height (TOF)	Overall Lowered Height	Overall Extended Height
	in. (mm)	in. (mm)	in. (mm)
2-Stage	135" (3429)	89" (2260)	222" (5638)
	147" (3735)	95" (2415)	234" (5943)
	165" (4190)	105" (2665)	252" (6400)
3-Stage	195" (4953)	89" (2260)	282" (7162)
	213" (5410)	95" (2415)	300" (7620)
	228" (5790) *	101" (2565)	315" (8001)
	240" (6096) *	105" (2665)	327" (8306)

Lift heights over 240" (6096 mm) maximum fork height may require reduced capacity depending upon DEC dimensions.

* Capacity will be reduced with 228" and 240" Masts and 41" Outriggers. Refer to High Lift Sheets.



Hyster Company
P.O. Box 7006
Greenville, North Carolina
27835-7006
Part No. R30XMS3/TG
3/2015 Litho in U.S.A.

Visit us online at www.hyster.com or call us at 1-800-HYSTER-1.

Hyster and are registered trademarks of Hyster Company. Hyster products are subject to change without notice.

The Hyster Company products included in this document may be covered by US Patent 6,684,148, and other patents pending. Truck on cover shown with optional equipment. ©2015 Hyster Company. All rights reserved.